


## Hooklift LA-series

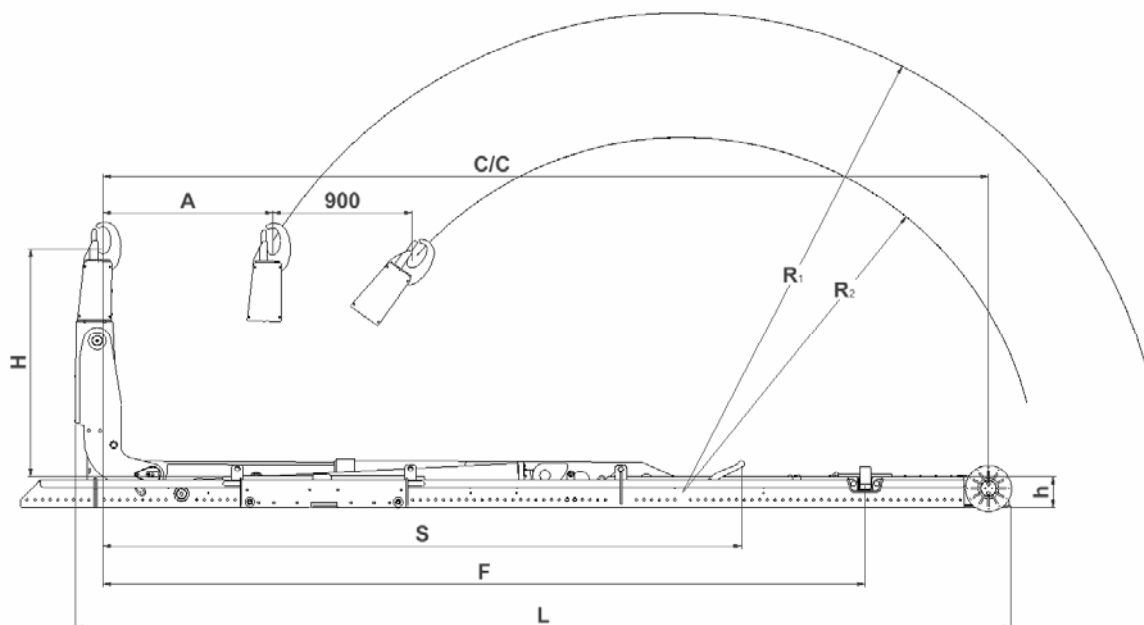

### Technical specification

Modell	Weight (kg)	Capacity (t)	Pressure (bar)	a°	Distance (mm)								Rec. Body length
					C/C	L	F Hydrauli c locking	S Spreader telegate release	A	H	R	h	
L17A – 4800	2211	17	250	63	4800	5110	4500	4150	1000	1450	2825/2025	196	3100-6000
L17A – 5000	2219	17	250	60	5000	5310	4600	4150	1100	1450	2825/2025	196	3200-6200
L17A – 5200	2245	17	250	56	5200	5510	4600	4150	1100	1450	2825/2025	196	3400-6400
L17A – 5400	2263	17	265	56	5400	5760	4800	4150	1100	1450	2990/2190	196	3600-6600
L17A – 5600	2314	17	270	53	5600	5910	4800	4150	1100	1450	2990/2190	196	3800-6800
L17A – 5750	2345	17	275	53	5750	6060	4800	4150	1100	1450	3116/2316	196	4000-7000
L17A – 5950	2377	17	280	50	5950	6260	4950	4150	1100	1450	3116/2316	196	4200-7200
L20A – 4800	2438	20	250	63	4800	5110	4500	4150	1000	1450	2825/2025	198	3100-6000
L20A – 5000	2446	20	250	60	5000	5310	4600	4150	1100	1450	2825/2025	198	3200-6200
L20A – 5200	2478	20	250	56	5200	5510	4600	4150	1100	1450	2825/2025	198	3400-6400
L20A – 5400	2496	20	265	56	5400	5760	4800	4150	1100	1450	2990/2190	198	3600-6600
L20A – 5600	2547	20	270	53	5600	5910	4800	4150	1100	1450	2990/2190	198	3800-6800
L20A – 5750	2578	20	275	53	5750	6060	4800	4150	1100	1450	3116/2316	198	4000-7000
L20A – 5950	2610	20	280	50	5950	6260	4950	4150	1100	1450	3116/2316	198	4200-7200
L20A – 6150	2649	20	280	47	6190	6460	4950	4150	1100	1450	3116/2316	198	4400-7400
L24A – 4800	2441	24	250	63	4800	5110	4500	4150	1000	1450	2825/2025	198	3100-6000
L24A – 5000	2449	24	250	60	5000	5310	4600	4150	1100	1450	2825/2025	198	3200-6200
L24A – 5200	2481	24	250	56	5200	5510	4600	4150	1100	1450	2825/2025	198	3400-6400
L24A – 5400	2499	24	265	56	5400	5760	4800	4150	1100	1450	2990/2190	198	3600-6600
L24A – 5600	2550	24	270	53	5600	5910	4800	4150	1100	1450	2990/2190	198	3800-6800
L24A – 5750	2581	24	275	53	5750	6060	4800	4150	1100	1450	3116/2316	198	4000-7000
L22A – 5950	2613	22	280	50	5950	6260	4950	4150	1100	1450	3116/2316	198	4200-7200
L22A – 6150	2652	22	280	47	6190	6460	4950	4150	1100	1450	3116/2316	198	4400-7400

We reserve the right to technical modifications without prior notification.